

## EVEREST<sup>™</sup>*pico* Green Picosecond Laser AP-515P

### Applications:

- Laser cutting, drilling and scribing (glass, sapphire, silicon, silicon carbide, ceramics, nitinol stents, CFRP, PCD and CVD diamond)
- Laser thin film patterning (TCO, metal, thin film solar cells)
- 2.5D surface shaping (metals, ceramics, plastics)
- Laser marking (glass, sapphire, silicon carbide, silicon, metals, plastics)

### Features:

- Picosecond pulses
- High pulse energy and peak power
- High repetition rate capability
- Near diffraction limited beam quality
- Rugged OEM package and compact size



### Optical Characteristics:

Parameter	Specification
Operation mode	Pulsed
Operating wavelength	515 nm
Average power	10 W, 15 W, 20 W
Pulse width	50 ps
Beam quality, M <sup>2</sup>	< 1.3
Output power stability	Within ±5%
Output delivery	Collimated output beam


(For custom requirements, please contact AdValue Photonics)

*Specifications subject to change without notice*

## General Characteristics:

Parameter	Specification
Operating temperature	10 to +30 °C
Storage temperature	+5 to +70 °C
Cooling	Water cooled (portable recirculating chiller available as an option)
Power requirement	AC 100~240 V (50/60Hz) (operating with AdValue Photonics Control Unit)
Warm-up time	10 minutes
Package dimensions	345(W) x 440(D) x 126(H) mm

## Mechanical Outline:

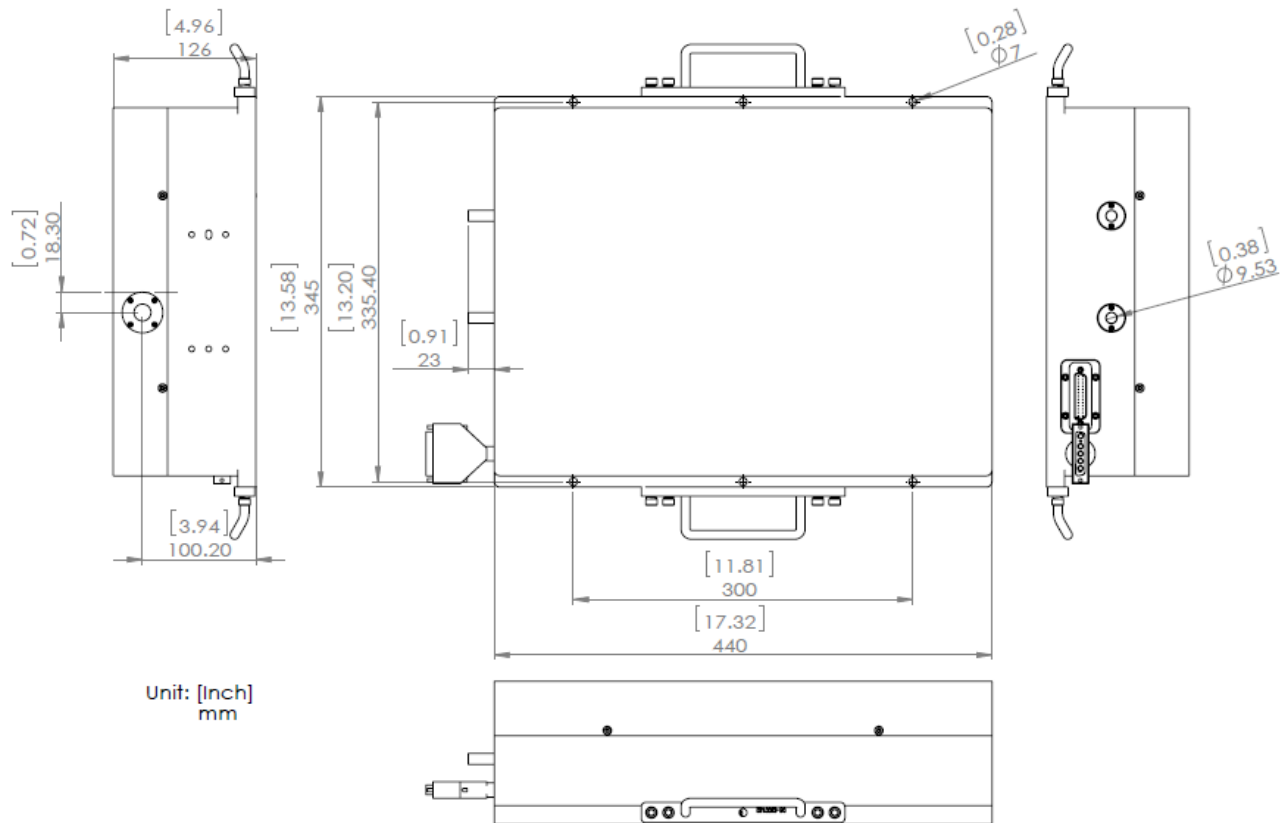

## Ordering Information:

Part Number: AP - 515P - xx - xxx

Standard Wavelength:  
515 = 5150 nm

Output Power:  
10 = 10 W  
xx = xx W

Pulse Energy:  
010 = 10 μJ  
xxx = xx μJ

Specifications subject to change without notice