

Visible to NIR Pulsed Single-Frequency Fiber Laser AP-P-SF (VIS to NIR)

The pulsed single-Frequency fiber laser is designed to provide the highest pulse energy in a single longitudinal mode, a powerful capability for research and industry applications.

With their compact size, high efficiency, low maintenance, and ease of operation, AdValue Photonics' fiber lasers provide many advantages over traditional bulk solid state lasers.

Applications:

- LIDAR
- Frequency conversion
- Mid-IR generation
- Spectroscopy

Features:

- Single longitudinal mode
- High pulse energy
- Customizable operating wavelength
- Nanosecond pulses
- Near diffraction limited beam quality
- Turn-key system with no maintenance required



Optical Characteristics:

Parameter	Specification
Operation mode	Pulsed
Spectral linewidth	Single Frequency (single longitudinal mode)
Typical operating wavelength	308, 515, 778, 935 nm (other wavelengths available upon request)
Pulse energy	Up to 0.5 mJ
Pulse width	2 ns to 300 ns (non-adjustable, factory selectable)
Pulse repetition rate	10 kHz to 1 MHz (non-adjustable, factory selectable)
Max. average power	Up to 40 W
Beam quality, M ²	< 1.3
Output polarization	Linear Polarization
Output delivery	Free-space collimated beam


(For special requirement, please contact AdValue Photonics for options.)

Specifications subject to change without notice

General Characteristics:

Parameter	Specification
Operating temperature	10 to +35 °C
Storage temperature	-10 to +70 °C
Cooling	Water cooled
Power requirement	AC 100~240 V (50/60Hz)
Warm-up time	10 minutes
Package dimensions	345(W) x 440(D) x 126(H) mm (the package may vary for different wavelengths and specs)

Mechanical Outline:

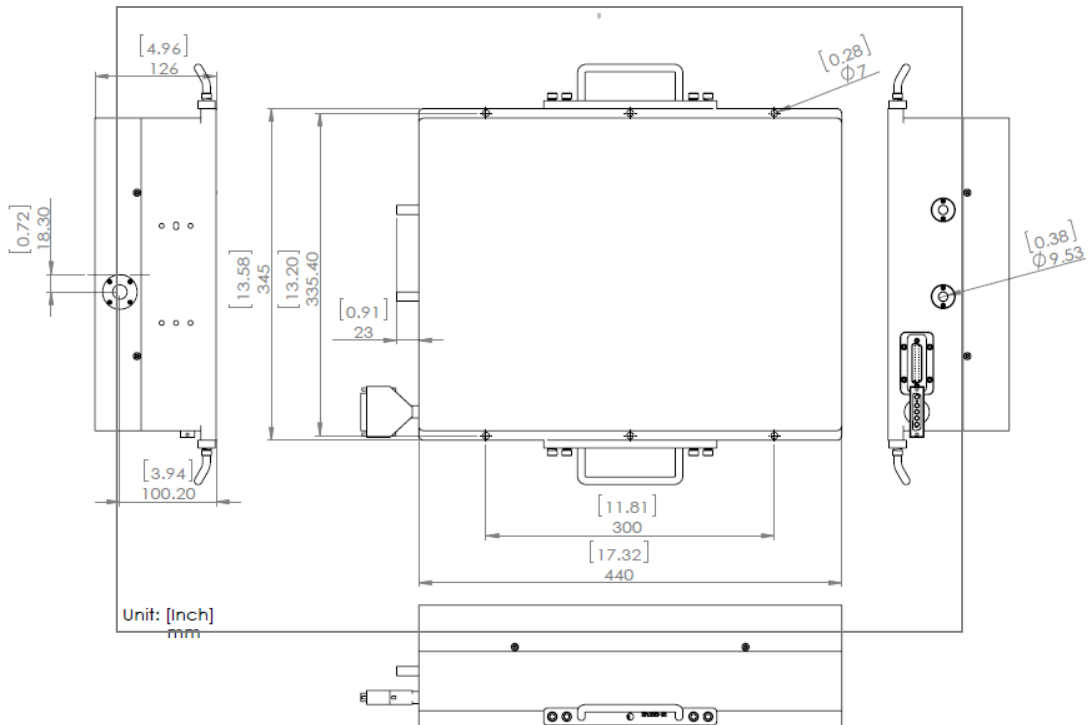

Ordering Information:

AP-P-SF	-	xxxx	-	xxxx or xx	-	xxx	-	xxx	-	xx
		Wavelength:		Pulse Energy:		Pulse Width:		Pulse Rep Rate:		Polarization:
		0515 = 515 nm		050 = 50 μJ		005 = 5 ns		010 = 10 kHz		LP = linear polarization
				500 = 500 μJ		100 = 100 ns		M001 = 1 MHz		



Specifications subject to change without notice